

Altus 40 RTS

Wired

RS485


Dry contact

RTS


io

SOLUTIONS FOR COMMERCIAL BUILDINGS

The diameter 40 mm RTS motor for external screens and interior blinds.



Applications




roller
blinds



roman
blinds



venetian
blinds



cellular
blinds



projection
screens



external
vertical
screens

- Suitable for tubes diameter 37 mm or more (internal diameter)
- Can be used for windows up to 9 m² for external vertical screens

Main characteristics

- > Fits small diameter tubes for compact cases
- > Easy integration thanks to the thin round head
- > RTS embedded with solar and wind protection functions compatibility
- > Integrated antenna
- > Remote limit settings
- > Visual feedback of the product to confirm any step of setting and programming
- > Same range of accessories as LS40
- > For external screens and interior blinds


Certifications



somfy®

CHARACTERISTICS

Supply voltage	120-240 V AC / 50/60 Hz
Degree of protection	IP 44
Operating temperature	-20 to 70°C
Protection class	Class II Class I for 120 V
Limit switch unit	Electronic
Conformity	www.somfy.com/ce

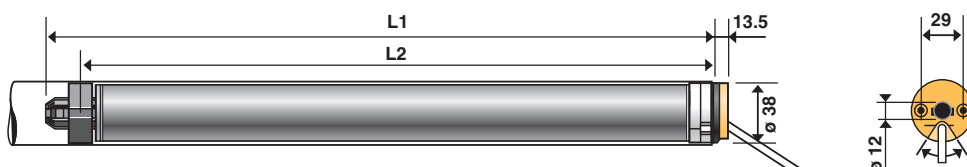

Performance


Nominal voltage	230 V / 50 Hz				120 V / 60 Hz		220 V / 60 Hz		
	Torque	3 Nm	4 Nm	9 Nm	13 Nm	4 Nm	9 Nm	3 Nm	4 Nm
Speed	30 rpm	14 rpm	14 rpm	8 rpm	36 rpm	16 rpm	30 rpm	16 rpm	16 rpm
Radio frequencies available for RTS	433,42 MHz				433,42 MHz		433,42 MHz		

Dimensions

L1 (in mm)	497	457	497	497	497	497	497	457	497
L2 (in mm)	473	433	473	473	473	473	473	433	473

Type of cable

230 V / 50 Hz
220 V / 60 Hz
2 threads by wire



120 V / 60 Hz
3 threads by wire

