

# KNX USB Interface (DRM), Ref. 9018243


EN

## Interface between PC and KNX bus

Data sheet

### Application area

This interface is for establish a bidirectional connection between a PC and the KNX installation bus. The USB connector has a galvanic separation from the KNX bus. Both ETS (Engineering Tool Software) versions ETS3 or later and some visualization tools support this interface.

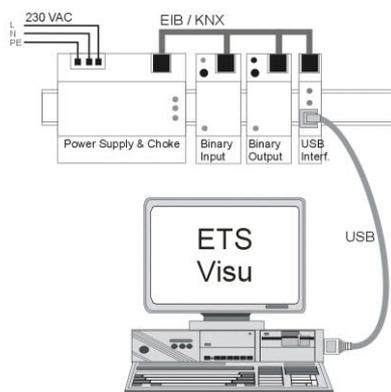

Typical application



SOMFY  
50 avenue du Nouveau Monde  
74307 Cluses Cedex, France  
[www.somfy-architecture.com](http://www.somfy-architecture.com)

### Technical Specification

#### Electrical Safety

- Protection (acc. EN 60529): IP 20
- Bus safety extra low voltage SELV DC 24 V

#### EMC requirements

- Complies with EN 61000-6-2, EN 61000-6-3 and EN 50090-2-2

#### Environmental requirements

- Ambient temp. operating: - 5 °C ... + 45 °C
- Ambient temp. Non-op.: - 25°C ... + 70 °C
- Rel. humidity (non-condensing): 5 % ... 93 %
- Certification
- KNX

#### CE norm

- Complies with the EMC regulations (residential and functional buildings)

#### Physical specifications

- Housing: Plastic
- DIN rail mounted device, width: 18 mm
- Weight: approx. 40 g
- Fire load: approx. 1000 kJ

#### Indicators

- Signal-LED (green) for USB connection
- Signal-LED (green) for KNX connection

#### Power supply

- The part of circuit for communication over USB is supplied by the connected PC / laptop, correct operation is signalled by the corresponding LED.  
Power consumption: < 200 mW
- The part of circuit for communication over KNX is supplied by KNX bus.  
Power consumption: < 100 mW

#### Connectors

- KNX connection terminal
- USB: USB connector type B  
Wire length max. 5 m