

RS485 Terminator

animeo Solo


animeo IB+

animeo IP

animeo KNX

animeo LON

SOLUTIONS FOR COMMERCIAL BUILDINGS

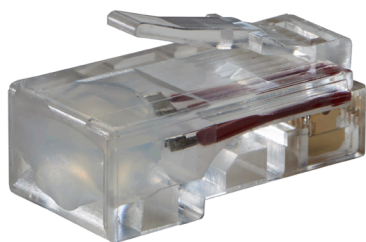

Ref. 9019005

A RS485 component designed to terminate RS485 network segment.

Installation advantages

> Easy plug in RJ45

Characteristics

Resistor	120 Ω , 0.3 W
• Current rating	1.5 A
• Dielectric withstanding voltage	1000 V RMS 50 Hz
• Contact resistance	max. 20 m Ω
• Insulation resistance	min. 500 M Ω
Output load regulation	+/- 5 %
Operating temperature	- 30 °C to + 90 °C
Storage temperature	- 30 °C to + 90 °C
Transport temperature	- 30 °C to + 90 °C
Housing material	Polycarbonate UL94V-2 Color: transparant
Contacts	Phosphor bronze alloy, gold plated over nickel
Pollutant	Comply witht RoHS
Weight	2 g

RJ45 connector

