

The io-homecontrol® solution for motorization of external venetian blind.



## Applications



external venetian blinds

Type 1 and type 2



• Suitable for the following headrails: SCHENKER (78 x 67 mm), HUNTER DOUGLAS (57 x 51 mm), STOREN MATERIAL (58 x 56 mm), GRIESSER (67 x 66 mm).

## Main characteristics



- > The J4 io actuator is composed of a J4 io motor and a J4 io captive plate
- > Offers all the io-homecontrol® functionalities (interoperability, end-user feedbacks...)
- > Safety stop (snow between slats, etc...) via a mushroom
- > 2D mushroom for protection in case of false / inversed installation
- > Electronic settings:
  - Bottom end-limit already set in factory
  - All other settings with any 3 buttons io remote control
- > Easy integration:
  - The shortest motor available on the market
  - U or N headrail mounting
  - Fast connection (plug and play) with Hirschmann plugs
  - Thin and aesthetic plate

## Certifications



CHARACTERISTICS

Supply voltage	230 V AC / 50 Hz
Degree of protection	IP 54 for motor IP 67 for plate
Operating temperature	20% -20 to 70°C 80% -10 to 40°C
Protection class	Class I
Limit switch unit	Electronic
Conformity	www.somfy.com/ce

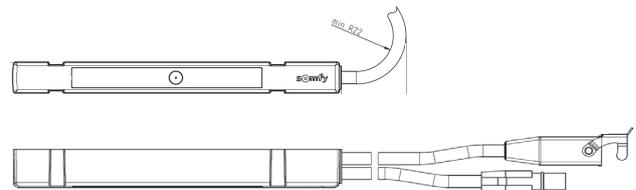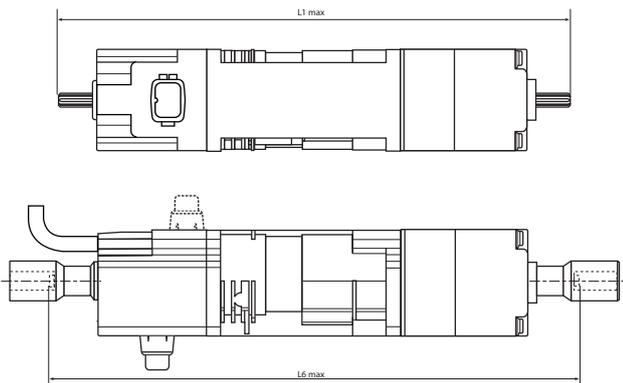


Performance

Nominal voltage	230 V / 50 Hz		
Torque	6 Nm	10 Nm	18 Nm
Speed	24 rpm	24 rpm	24 rpm

Dimensions

L1 (in mm)	254	269	289
L6 (in mm)	265	280	300

Type of cable



1	Neutral	Blue
2	Active	Brown
3	None	None
⏏	Earth	Green / Yellow